

Electric Vehicles Lithium-Polymer Ion Battery Dynamic Behaviour Charging Identification and Modelling Scheme

Peter Makeen,^{1,2} Hani A. Ghali,¹ Saim Memon,^{2,3,4,5} and Fang Duan²

¹Electrical Engineering Department, Faculty of Engineering, The British University in Egypt (BUE),
El-Sherouk, 11837 Egypt

²London Centre for Energy Engineering, Division of Electrical and Electronic Engineering,
School of Engineering, London South Bank University, London, SE1 0AA UK

³School of Engineering, Arden University, Coventry, CV3 4FJ UK

⁴Jiangsu Sanyou Dior Energy-Saving New Materials Co., Ltd (SANYOU DIOR), Changzhou,
Jiangsu 213149, China

⁵Department for Engineering, School of Engineering and the Built Environment,
Birmingham City University, Birmingham B4 7XG UK

(Received 21 June 2023; Revised 17 July 2023; Accepted 02 August 2023; Published online 03 August 2023)

Abstract: Lithium-ion batteries are considered the substantial electrical storage element for electric vehicles (EVs). The battery model is the basis of battery monitoring, efficient charging, and safety management. Non-linear modelling is the key to representing the battery and its dynamic internal parameters and performance. This paper proposes a smart scheme to model the lithium-polymer ion battery while monitoring its present charging current and terminal voltage at various ambient conditions (temperature and relative humidity). Firstly, the suggested framework investigated the impact of temperature and relative humidity on the charging process using the constant current-constant voltage (CC-CV) charging protocol. This will be followed by monitoring the battery at the surrounding operating temperature and relative humidity. Hence, efficient non-linear modelling of the EV battery dynamic behaviour using the Hammerstein-Wiener (H-W) model is implemented. The H-W model is considered a black box model that can represent the battery without any mathematical equivalent circuit model which reduces the computation complexity. Finally, the model beholds the boundaries of the charging process, not affecting on the lifetime of the battery. Several dynamic models are applied and tested experimentally to ensure the effectiveness of the proposed scheme under various ambient conditions where the temperature is fixed at 40°C and the relative humidity (RH) at 35%, 52%, and 70%. The best fit using the H-W model reached 91.83% to describe the dynamic behaviour of the battery with a maximum percentage of error 0.1 V which is in good agreement with the literature survey. Besides, the model has been scaled up to represent a real EV and expressed the significance of the proposed H-W model.

Keywords: battery identification; electric vehicles; EV fast charging; Hammerstein-Wiener; Lithium-polymer ion battery

I. INTRODUCTION

Lithium-ion batteries (LIBs) with all categories have been extensively utilized for most electronic equipment and massively in electric vehicles (EVs). LIBs are commercialized because of their high energy concerning their size, long lifetime span, high efficiency, and low rate of self-discharging [1]. Due to the non-linear behaviour of the LIB while charging, and the variety of the input parameters which affect the charging process such as charging current, and ambient conditions represented by temperature and relative humidity, an accurate identification model of its dynamic behaviour is required [1].

The environmental temperature has a main impact on lithium-ion batteries' charging and discharging operations. The recommended ambient conditions were suggested to be from 20°C to 45°C. Exceeding the upper limit may lead the battery to an acceleration in the capacity degradation rate

and thermal hazards [2]. The temperature and capacity rates are influencing the degradation rate of the battery. In the range from 10°C to 60°C, the degradation rate raised while implementing low C rates. Despite of this, the degradation at 45°C is lower than that at 25°C while utilizing the 2C rate. It is concluded that each temperature and C rate have its own characteristics and battery representation [3]. In [4,5], the charging operation of the lithium-polymer ion battery is investigated at different ambient conditions to recognize and classify the EV. In [6], the authors demonstrated that the operation of the Li-O₂ batteries has been affected by the humidity where the water can collapse cyclic and rate abilities. Consequently, EV batteries' robust monitoring and modelling are required at any ambient condition to represent the non-linear dynamic behaviour and avoid the hazard of fast charging. The variation in ambient conditions created a direct need for an efficient and accurate non-linear representation of the EV battery's performance.

Models of the LIBs could be assorted into two major classes: the electrochemical (EC) and the electrical equivalent circuit (EEC) models. The EC model represents the

Corresponding author: Peter Makeen (e-mail: peter.makeen@bue.edu.eg).

physical-chemical internal reactions inside the battery [7,8] and the EEC model expresses the battery through electronic parameters such as resistors and capacitors. The equivalent circuit models can be categorized into the Rint model, Partnership for a New Generation of Vehicles (PNGV) model, and RC transient models which are branched from the 1st-order to nth-order transient model [9–12]. In [13], electrical equivalent circuit models from 1RC to 5RC transient models have been used to describe the LIB. The parameters are evaluated at various temperatures of 0°C, 25°C, and 45°C. The 3RC EEC model ensured optimum accuracy and minimum error of 1.8% using the non-linear least square algorithm. In [14], the electrothermal modelling of lithium-ion batteries has been investigated by 1RC ECM. In addition, the battery’s internal parameters at different temperatures and current rates have been investigated. An improved reduced-order electrochemical model (IROEM) is proposed in [15]. In [16], a novel mesoscale electrothermal modelling is presented. In [9,17–19], the 2RC transient circuit has been used in modelling the lithium-polymer ion battery; however, multi-experimental procedures are accomplished to calculate the EEC model components such as ohmic internal resistance, and electrochemical and concentration polarization resistances and capacitances.

The variety of the ambient conditions represented by the temperature and relative humidity created a direct need for an accurate model of the LIB with a minimum percentage of error and high accuracy to describe the battery in any environmental circumstances. The EV battery modelling research area is directed to focus on the system identification methods [20–22] which were dealing with the battery cells as a non-linear dynamic behaviour like most real systems. Hence, the white box model and black box model are utilized to express the systems [23]. In [24], the Adaptive Neuro-Fuzzy Inference System (ANFIS) model is utilized to express the LIB and is considered a black box model. In [23], Hammerstein-Wiener (H-W) model ensured the best fit of 89.79%, 93.53%, and 94% for representing the LIB at various driving cycles while the temperature is fixed at 25°C. In [25], the authors used polynomial and H-W models for both the charging and discharging cycles to ensure higher accuracy. However, the maximum error using the H-W and polynomial models reached 10.6% and 10.8%, respectively. In [26], the components of the 2RC model have been identified using both the continuous and discrete time models. In [27], mathematical models are used to calculate the LIB’s unknown coefficients for efficient monitoring and quick charging. However, the forementioned models didn’t represent the dynamic behaviour of the LIB under any environmental conditions. This paper suggests a clear framework for expressing the lithium-polymer ion battery’s non-linear charging operation by monitoring the surrounding environmental circumstances. This is followed by a set of recommendations for the EV’s user to avoid overcharging current and voltage.

II. METHODOLOGY

An approach for monitoring the electric vehicles’ battery dynamic behaviour is proposed in this article. This scheme consists of multiple stages as shown in Fig. 1; Firstly, the influence of various environmental conditions on the charging operation of the lithium-polymer ion battery is investigated. Then sufficient identification and modelling of the

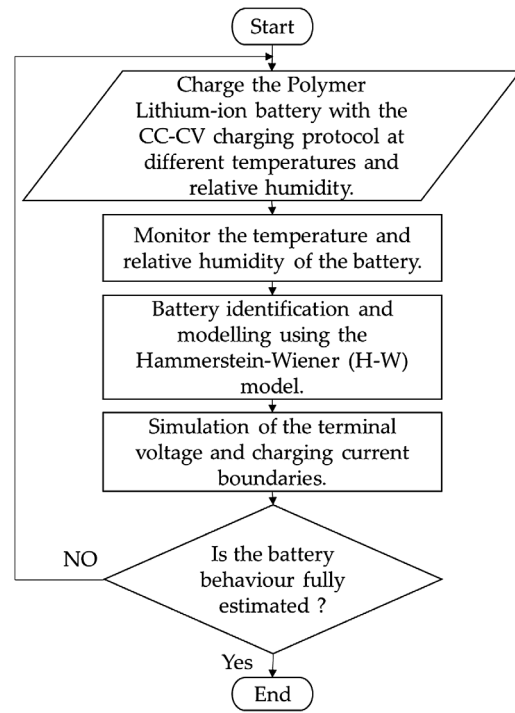


Fig. 1. A flowchart of the proposed approach.

battery are obtained through full monitoring of the battery’s dynamic behaviour at any ambient condition. Finally, a user guide of the charging boundaries is suggested based on the battery dynamic model to alleviate the degradation rate of the battery and avoid hazardous operations.

A. HAMMERSTEIN-WIENER (H-W) IDENTIFICATION MODEL

Instead of the electrochemical and electrical equivalent circuit representation models, Hammerstein-Wiener (H-W) identification model is implemented to express the output non-linear performance of the LIB. It is extensively utilized in non-linear industrial systems [28]. This model is composed of a non-linear block which is called the Hammerstein model followed by the linear block which is called the Wiener [29]. The main stages of the H-W identification model are represented in Fig. 2. The procedure of these stages is started by converting the non-linearity experimental input data to a dynamic linear block which is called the Hammerstein model. This is followed by

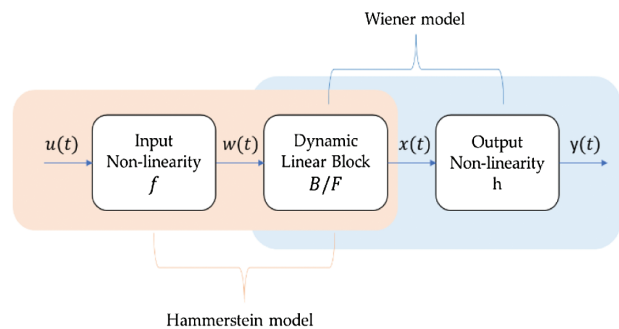


Fig. 2. Schematic representation of the H-W identification model [4].

the Wiener model which converts the linear model to the output non-linear required results. The main equations are expressed in [23,29,30] and presented as follows

$$w(t) = f(u(t)) \tag{1}$$

$$x(t) = \frac{B}{F}w(t) \tag{2}$$

$$y(t) = h(x(t)) \tag{3}$$

where $w(t)$ and $x(t)$ are the input and output of the dynamic linear block, respectively, and $y(t)$ is the output of the H-W identification model.

B. DATA COLLECTION

In this study, the EV is presented by a small-scaled lithium-polymer ion battery of 1,000 mAh with a working temperature from 0°C to 40°C and the charging and discharging cut-off voltage of 4.2 ± 0.05 V and 2.75 V, respectively.

The influence of varying the temperature and relative humidity on the charging operation is scrutinized by testing

the battery in different ambient conditions using a controlled chamber as in our previous research articles [4,5] and presented in Fig. 3(a). The constant current stage followed by the constant voltage stage (CC-CV) charging protocol is used to charge the battery as shown in Fig. 3(b). The battery’s VI characteristics (charging current and the corresponding terminal voltage) are scrutinized at 30°C and 40°C while fixing the RH of 52%. The temperature/RH sensor used is the DHT11 and located inside the chamber and far from the lithium-polymer ion battery under the test by almost 2 cm.

It is observed that the battery is fully charged at 4,742 sec and 4,919 sec at 30°C and 40°C, respectively, as shown in Fig. 4(a) and (b). Hence, while raising the temperature the charging time is increased. In addition, another test has been performed on the battery while maintaining the temperature at 40°C and varying relative humidity. The interval time required for the battery to reach full capacity is 4,606 sec, 4,938 sec, and 5,690 sec for the RH of 35%, 52%, and 70%, respectively, as shown in Fig. 4(c) and (d). Hence, whenever the RH is increased the charging time is increased. In addition, as declared in Fig. 4(c) the charging process could be split into the CC stage and CV stage. Whenever the RH increased, the interval time of the CC stage becomes very short with respect to low RH conditions. However, the CV stage took longer interval time than the low RH conditions. Consequently, high RH directs the lithium-polymer ion battery to take more time while charging.

Based on the proposed experiments, it is observed that whenever there is any change in the ambient conditions represented by temperature or/and relative humidity, the charging pattern differs from one case to another, so a sufficient lithium-polymer ion battery identification model must be obtained. In this paper, the H-W identification model is used to represent the dynamic performance of the battery under any circumstances as will be scrutinized in the following sections.

III. EV BATTERY DYNAMIC BEHAVIOUR MODELLING

The H-W identification model has been used to estimate the dynamic performance of the lithium-polymer ion battery with a model structure of one numerator order and three denominator order utilizing various search methods. Three ambient conditions of the battery have been utilized in this study where the temperature is kept constant at 40°C and the RH is varied to be 35%, 52%, and 70%. The CC-CV protocol is used with a current stage of 0.9A to charge the lithium-polymer ion battery in all conditions. The relationship between the experimental and simulated model output using the H-W identification model of all conditions is presented in Fig. 5. Each charging process at a specific ambient condition could be represented with different VI characteristics (charging current and the corresponding battery’s terminal voltage) which will be reflected in the interval time. Consequently, the H-W identification model tries to represent the battery’s dynamic performance in any environmental condition and tracks all the curvatures on the graph to reach the optimum fit of performance. The best-fit results for all the mentioned conditions are 90.98%, 91.83%, and 82.24%, respectively, using the Levenberg-Marquardt (LM), Gauss-Newton (GN), and Adaptive

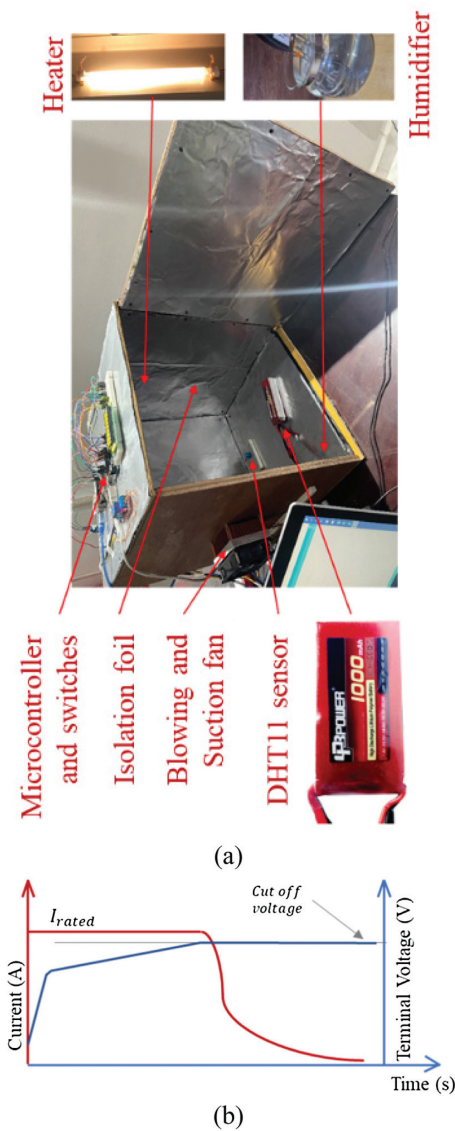


Fig. 3. (a) The proposed test rig and (b) the CC-CV charging protocol [4,31].

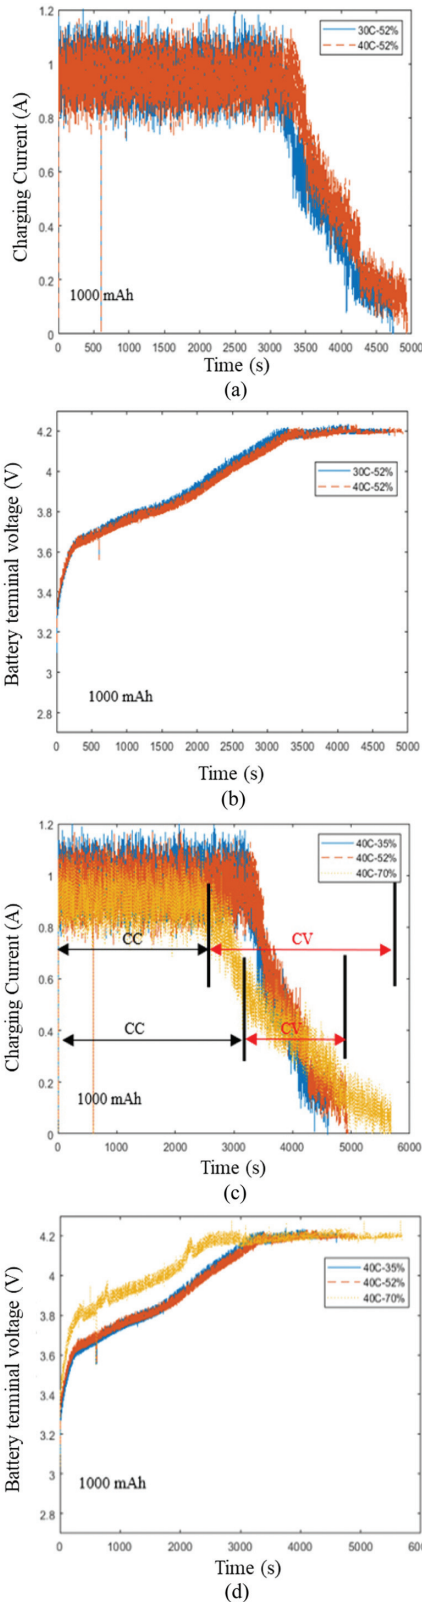


Fig. 4. The charging VI characteristics of the utilized battery (a), (b) at different temperatures of 30°C and 40°C while maintaining the RH constant at 52%, (c), and (d) at various RH of 35%, 52%, and 70% while maintaining the temperature constant at 40°C [4].

Gauss-Newton (GNA) search methods, respectively. The selection of the search method is automatically performed using the Matlab/SIMULINK Program to reach the optimum solution.

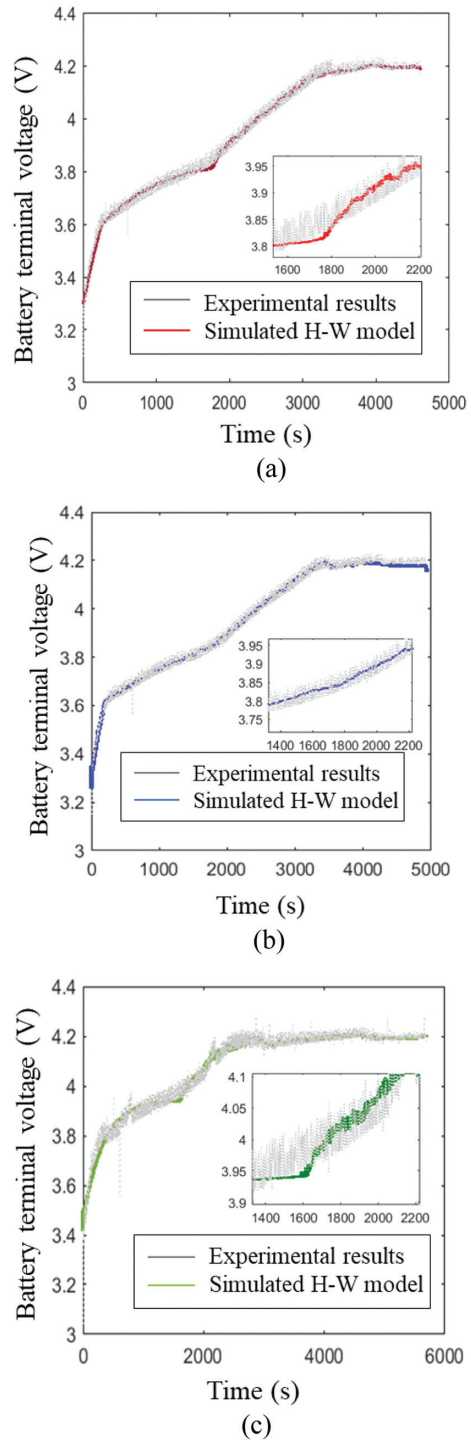


Fig. 5. Battery identification and modelling using the H-W identification model of 1,000 mAh lithium-polymer ion battery at different RH of 35%, 52%, and 70%, respectively, while maintaining the temperature at 40°C.

A. HAMMERSTEIN-WIENER (H-W) MODEL VALIDATION

The effectiveness of the suggested non-linear identification model is presented in Fig. 5 which declares the variance between the experimental and simulated battery terminal voltage for each ambient condition. The battery’s terminal voltage error at a specific temperature of 40°C and various RH of 35%, 52%, and 70% reached almost 0.05 V, 0.05 V,

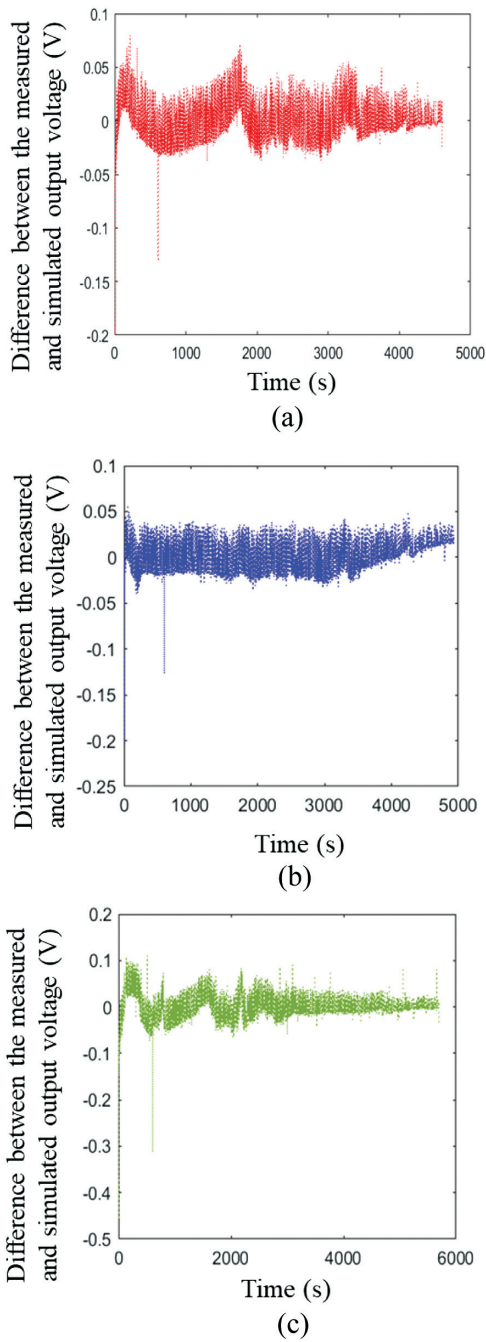


Fig. 6. The variance between the experimental and simulated battery's output terminal voltage at a fixed temperature of 40°C and different RH of 35%, 52%, and 70%, respectively.

and 0.1 V, respectively, which is almost equivalent to 1.35%, 1.35%, 2.7% of the battery nominal voltage (3.7 V) as observed in Fig. 6, respectively. These values prove the good performance of the H-W identification model concerning the literature survey [25].

The results that represent the battery dynamic behaviour identification best fit, the search method using the H-W model, and the terminal voltage error at different ambient conditions are represented in Table I.

To validate the H-W model, the temperature is fixed at 40°C and the RH at 35%. The battery has been charged by the CC-CV charging protocol by 0.5 A where the terminal voltages of the simulated and measured battery are expressed in Fig. 7(a). In addition, Fig. 7(b) declares the output

Table I. Battery identification comparative study at different ambient conditions using the H-W model

Ambient condition (Temp, RH) (%)	Best fit (%)	Terminal voltage error (V)	Search method
40°C, 35	90.98	0.05	LM
40°C, 52	91.83	0.05	GN
40°C, 70	82.24	0.1	GNA

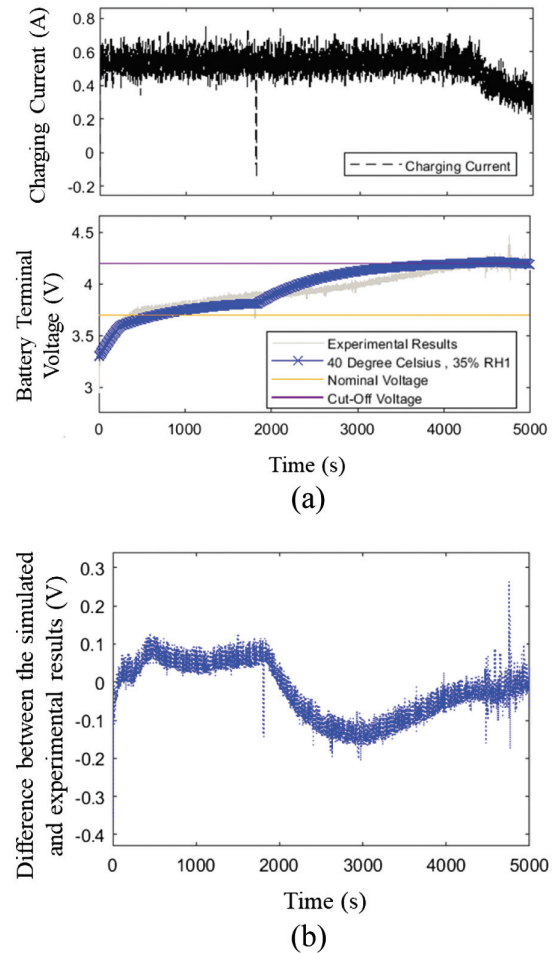


Fig. 7. H-W model validation at 40°C and RH at 35% (a) the charging current using the CC-CV and terminal voltage of the simulated and measured results and (b) the variance between the experimental and simulated outcomes.

difference between the modelled and experimental representations, ensuring the high performance of the suggested model where the maximum error reached 0.176 V which is equivalent to 4.757% of the battery nominal voltage (3.7 V).

The final stage of the presented model depends on the sufficient identification model estimated in the previous stage. This stage expresses the permitted charging current and output terminal voltage of the battery at any ambient condition to prevent battery degradation and avoid any hazardous operation.

IV. COMPARATIVE STUDY

As shown in Fig. 8, the output battery terminal voltage while charging by 0.9 A is expressed throughout the three mentioned conditions. The batteries reached the nominal voltage

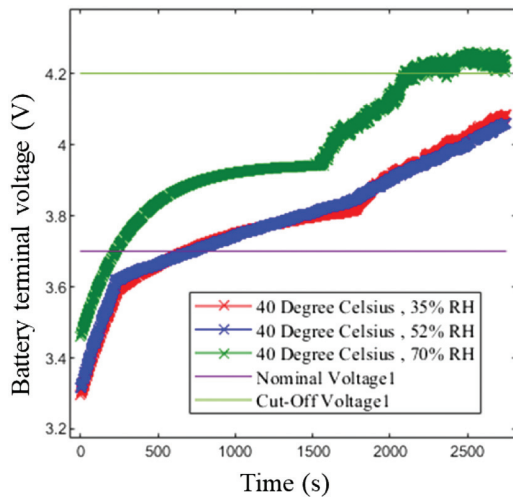


Fig. 8. The output terminal voltage while charging by 0.9 A on the proposed H-W identification models at the proposed ambient conditions.

after 635.465 sec, 750.423 sec, and 220.337 sec, respectively. Besides, the 3rd case study which represents the battery at 40°C and RH of 52% reached its cut-off voltage at 2,111 sec. Hence, whenever you exceeded the permitted battery’s terminal voltage, you accelerate the degradation factor rate and shorten the cycle life which may cause the battery’s hazard.

V. EV LITHIUM-ION BATTERY SCALING-UP REPRESENTATION

In this section, the lithium-polymer ion battery is scaled up to match the 2015 Chevrolet Spark EV specifications [31]. This category uses the LG Chem lithium-ion battery with a nominal cell voltage of 3.7 V, a nominal system voltage of 355.2 V, and 192 cells of 6 modules. In our case study, we will implement the same configuration with our lithium-polymer ion battery of 1,000 mAh to investigate the importance of the H-W identification model in any environmental condition. However, the internal heat impact of the cells on each other was considered constant in the proposed model. The utilized modules in real EVs are specified with high energy capacity rates reached to 200 kWh [31]. In our case study, we used a lithium-polymer ion battery with a 1,000 mAh battery capacity to format the module. The EV battery is composed of 16 cells in series and parallels with another 16 series cells to format the module. This category has 6 modules in a series connection.

Three H-W identification models are implemented as shown in Fig. 9(a). The scaling-up ensured the best fit of 90.3%, 91.23%, and 83.37% for the mentioned case studies, respectively. The EV battery terminal voltage variance between the simulated and scaled-up data reached 5 V, 5 V, and 7 V, respectively, which means an error of 1.4%, 1.4%, and 1.97%, respectively, with respect to the nominal voltage of the battery (355.2 V). This representation is based on the assumption that the ambient conditions of the battery’s pack are the same as the 1,000 mAh battery used in the previous sections. As observed in Fig. 9(b), the three conditions have been charged with the same charging current and reached the nominal voltage in 547.958 sec, 690.903 sec, and 207.611 sec, respectively. In addition, the 3rd case study reached the cut-off voltage (403.2 V) in 2,719 sec; however, the other cases did not reach the upper

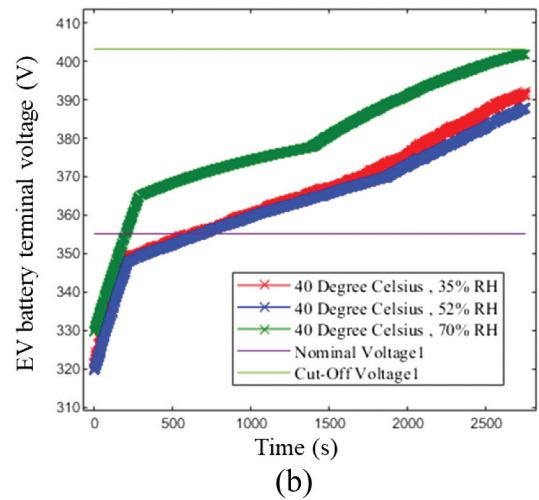
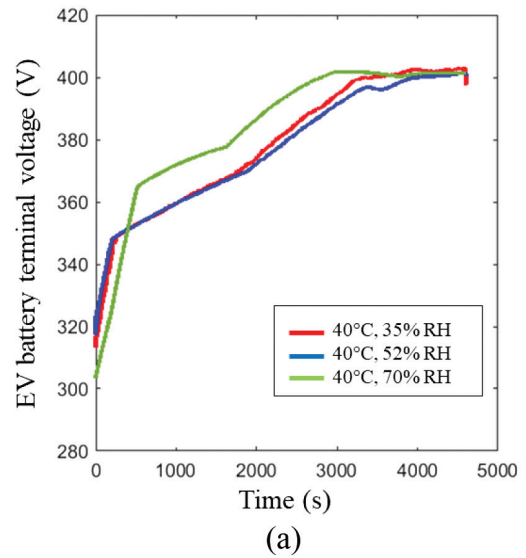


Fig. 9. The EV battery terminal voltage after scaling up at various ambient conditions.

limit till the end of the simulation time 2,750 sec. The degradation rate will be increased when you exceed the cut-off voltage as mentioned in the literature survey.

VI. CONCLUSION

A novel schematic charging framework based on the monitoring and modelling of the lithium-polymer ion battery is suggested and investigated in this article. A non-linear black box model for a lithium-polymer ion battery of 1,000 mAh is proposed based on the Hammerstein-Wiener (H-W) identification model. The non-linear H-W model represented the EV battery’s electrical dynamic behaviour at different environmental circumstances of temperature and RH. The proposed model ensured the best fit of 90.98%, 91.83%, and 82.24% for different ambient conditions with a maximum error of 0.05 V, 0.05 V, and 0.1 V, respectively. A comparative study between the different models has been established while charging by the same current to indicate the importance of accurate modelling accompanied by the minimum percentage of error. In addition, a scaling-up case study is proposed based on the EV battery specification in the market. This could be a smart warning flag for the EV’s user while charging to

improve the storage security, safety operation, and battery management performance. The proposed model could be supported by artificial intelligence algorithms to estimate all the required models at the remaining ambient conditions.

CONFLICT OF INTEREST STATEMENT

The authors declare no conflicts of interest.

REFERENCES

- [1] A. B. Khan and W. Choi, "Optimal charge pattern for the high-performance multistage constant current charge method for the Li-ion batteries," *IEEE Trans. Energy Convers.*, vol. 33, no. 3, pp. 1132–1140, 2018.
- [2] D. Ouyang, J. Weng, M. Chen, and J. Wang, "Impact of high-temperature environment on the optimal cycle rate of lithium-ion battery," *J. Energy Storage*, vol. 28, p. 101242, 2020.
- [3] Y. Yin and S.-Y. Choe, "Actively temperature controlled health-aware fast charging method for lithium-ion battery using nonlinear model predictive control," *Appl. Energy*, vol. 271, p. 115232, 2020.
- [4] P. Makeen, H. A. Ghali, S. Memon, and F. Duan, "Impacts of electric vehicle fast charging under dynamic temperature and humidity: experimental and theoretically validated model analyses," *Energy*, vol. 261, p. 125335, 2022.
- [5] P. Makeen, H. A. Ghali, and S. Memon, "Investigating an influence of temperature and relative humidity on the electrical performance of lithium polymer ion battery using constant-current and constant voltage protocol at small scale for electric vehicles," in *11th Inter. Conf. Power Elect. Mach. Driv. (PEMD 2022)*, pp. 126–130, 2022. DOI: [10.1049/icp.2022.1030](https://doi.org/10.1049/icp.2022.1030)
- [6] Z. Guo, X. Dong, S. Yuan, Y. Wang, and Y. Xia, "Humidity effect on electrochemical performance of Li–O₂ batteries," *J. Power Sources*, vol. 264, pp. 1–7, 2014.
- [7] C. Li, N. Cui, C. Wang, and C. Zhang, "Reduced-order electrochemical model for lithium-ion battery with domain decomposition and polynomial approximation methods," *Energy*, vol. 221, p. 119662, 2021.
- [8] S. Pramanik and S. Anwar, "Electrochemical model based charge optimization for lithium-ion batteries," *J. Power Sources*, vol. 313, pp. 164–177, 2016.
- [9] P. Makeen, H. Ghali, and S. Memon, "Experimental and theoretical analysis of the fast charging polymer lithium-ion battery based on Cuckoo Optimization Algorithm (COA)," *IEEE Access*, vol. 8, pp. 140486–140496, 2020.
- [10] X. Zhang, W. Zhang, and G. Lei, "A review of li-ion battery equivalent circuit models," *Trans. Electr. Electron. Mater.*, vol. 17, no. 6, pp. 311–316, 2016.
- [11] T. Grandjean, A. McGordon, and P. Jennings, "Structural identifiability of equivalent circuit models for Li-ion batteries," *Energies*, vol. 10, no. 1, p. 90, 2017.
- [12] Y. Gao, X. Zhang, Q. Cheng, B. Guo, and J. Yang, "Classification and review of the charging strategies for commercial lithium-ion batteries," *IEEE Access*, vol. 7, pp. 43511–43524, 2019.
- [13] B. L. Bairwa, K. Pareek, and S. K. Hampannavar, "Investigation on lithium ion battery equivalent circuit models for dynamic load profiles," *Energy Storage*, vol. 3, no. 2, p. e231, 2021.
- [14] Z. Yang, D. Patil, and B. Fahimi, "Electrothermal modeling of lithium-ion batteries for electric vehicles," *IEEE Trans. Veh. Technol.*, vol. 68, no. 1, pp. 170–179, 2018.
- [15] L. Wu, K. Liu, and H. Pang, "Evaluation and observability analysis of an improved reduced-order electrochemical model for lithium-ion battery," *Electrochim. Acta*, vol. 368, p. 137604, 2021.
- [16] Y. Xie, W. Li, X. Hu, C. Zou, F. Feng, and X. Tang, "Novel mesoscale electrothermal modeling for lithium-ion batteries," *IEEE Trans. Power Electron.*, vol. 35, no. 3, pp. 2595–2614, 2019.
- [17] P. Makeen, H. Ghali, and S. Memon, "Controllable electric vehicle fast charging approach based on multi-stage charging current methodology," in *2020 IEEE International Conference on Power and Energy (PECon)*, pp. 398–403, 7 Dec, 2020. DOI: [10.1109/PECon48942.2020.9314471](https://doi.org/10.1109/PECon48942.2020.9314471)
- [18] S. S. Madani, E. Schaltz, and S. Knudsen Kær, "An electrical equivalent circuit model of a Lithium titanate oxide battery," *Batteries*, vol. 5, no. 1, p. 31, 2019.
- [19] P. Makeen, H. A. Ghali, and S. Memon, "Theoretical and experimental analysis of a new intelligent charging controller for off-board electric vehicles using PV standalone system represented by a small-scale Lithium-ion battery," *Sustainability*, vol. 14, no. 12, p. 7396, 2022.
- [20] H. Hjalmarsson, "System identification of complex and structured systems," *Eur. J. Control*, vol. 15, no. 3–4, pp. 275–310, 2009.
- [21] T. Qian, X. Wang, and L. Zhang, "MIMO frequency domain system identification using matrix-valued orthonormal functions," *Automatica*, vol. 133, p. 109882, 2021.
- [22] S. L. Chavan, "Polynomial and transfer function models for multi input single output (MISO) PEM fuel cell by system identification methodology," *Int. J. Ambient Energy*, vol. 43, no. 1, pp. 4623–4628, 2022.
- [23] J. Khalfi, N. Boumaaz, A. Soulmani, and E. M. Laadissi, "Nonlinear modeling of Lithium-ion battery cells for electric vehicles using a Hammerstein–Wiener model," *J. Electric. Eng. Technol.*, vol. 16, no. 2, pp. 659–669, 2021.
- [24] M. B. Jamshidi, M. Jamshidi, and S. Rostami, "An intelligent approach for nonlinear system identification of a li-ion battery," in *2017 IEEE 2nd Int. Conf. Auto. Control Intel. Sys. (I2CACIS)*, *IEEE*, pp. 98–103, 2017.
- [25] S. Bouzaid, C. Ennawaoui, M. Mossaddek, and A. El Ballouti, "Lithium-ion battery modeling using dynamic models," *Mater. Today: Proc.*, vol. 66, pp. 5–10, 2022.
- [26] B. Xia, X. Zhao, R. De Callafon, H. Garnier, T. Nguyen, and C. Mi, "Accurate Lithium-ion battery parameter estimation with continuous-time system identification methods," *Appl. Energy*, vol. 179, pp. 426–436, 2016.
- [27] K. Tsang, L. Sun, and W. L. Chan, "Identification and modelling of Lithium ion battery," *Energy Convers. Manag.*, vol. 51, no. 12, pp. 2857–2862, 2010.
- [28] K.-K. Xu, H.-D. Yang, and C.-J. Zhu, "A novel extreme learning machine-based Hammerstein–Wiener model for complex nonlinear industrial processes," *Neurocomputing*, vol. 358, pp. 246–254, 2019.
- [29] A. Wills, T. B. Schön, L. Ljung, and B. Ninness, "Identification of Hammerstein–Wiener models," *Automatica*, vol. 49, no. 1, pp. 70–81, 2013.
- [30] E. S. Nadimi, O. Green, V. Blanes-Vidal, J. J. Larsen, and L. P. Christensen, "Hammerstein–Wiener model for the prediction of temperature variations inside silage stack-bales using wireless sensor networks," *Biosyst. Eng.*, vol. 112, no. 3, pp. 236–247, 2012.
- [31] P. Makeen, H. A. Ghali, and S. Memon, "A review of various fast charging power and thermal protocols for electric vehicles represented by lithium-ion battery systems," *Future Transport.*, vol. 2, no. 1, pp. 15, 2022.